



HPL-2 Self-levelling Plumb Laser

Features:

- *Hi-accurate self-leveling plumb laser
- *Bull eye laser beam
- *Ideal for high building construction.





Specification:

Laser Source	635nm, visible
Laser Safety Class	<1mw, CLASS 2M
Plumbing Laser Range	
Upward	100m
Downward	5m
Compensation	Electronic Self-levelling
Compensation range	Upward:±3°Downward:±2.5°
Accuracy	
Upward	±10"
Downward	±1'(±0.3mm/1m)
Spot Size	
Upward	∅ 15mm (emit aperture)
Downward	∅ 6mm (emit aperture)
Power Supply	rechargeable battery: 5X1.2v
Continuous working time	≥ 16 hours
Dimension	170mm(L) × 170mm(W) × 241mm(H)
Weight	2.5KG
Working Temperature	(-20°C) → (+50°C)

Applications

Establishing reference points on the floors in building construction.
Establishing Perpendicularity of Towers and Smoke-stacks.

Establishing True Vertical in the Steel Structural Frame.
Checking and Measuring Distortions of Tanks.

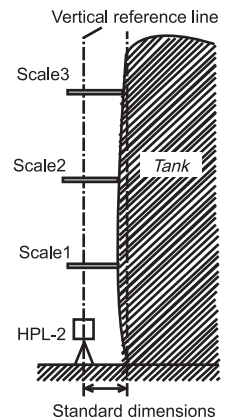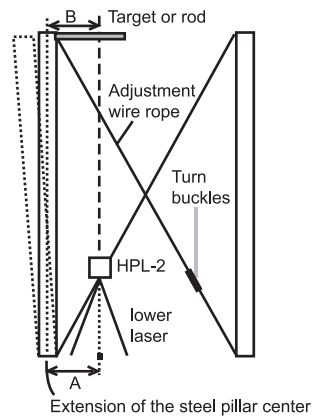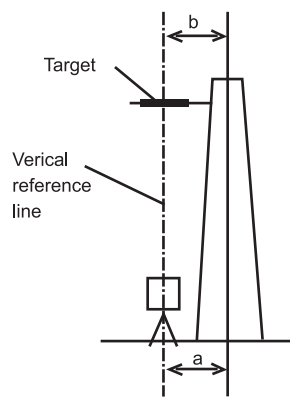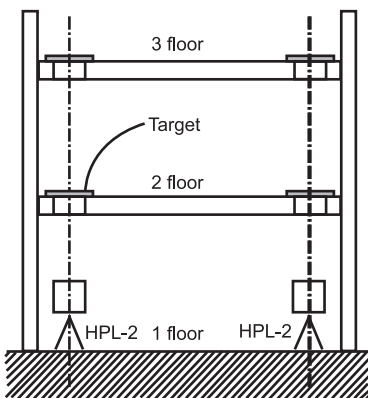

SHANGHAI MERRYPAL IMPORT & EXPORT CO.,LTD

RM D5 9F, JIANGSU MANSION, 528 LAOSHAN ROAD,
SHANGHAI, 200122, P.R. CHINA

TEL: 86-21-50819935, 50819936 FAX: 86-21-50819938

E-mail: chinasureveying@yahoo.com WEBSITE: www.orientssurveying.com